

FLOOR STANDING

LCD Advertising Display



High definition picture perfect quality. Intelligent temperature control system. High-fidelity quality sound.

Easy 178 degrees viewing angles.

FUNCTIONS & PARAMETERS



Adopt high sensitive IR/Capacitive points touch screen.



Easy upgradeable options available; Android, Windows and network.



By using the visual extension technology (S-PVA) it will give an easy 178 degrees viewing angle. No deformed pictures and no color distortion, perfect viewing.



Our intelligent temperature control system will regulate and protect the equipment. Keeping the unit performance at peak level.



Only professional / commercial grade A+ are used for our products. High brightness and contrast ratios are the key in delivering great visible advertising.



Can be upgraded to I3,I5 configuration.



With a fast 5ms response time, blur, ghosting and distortion will be eliminated, giving way to a perfect dynamic picture .



Our full metal shielding structure will prevent any exterior electromagnetic interference.



Our units are equipped with high quality digital audio outputs.



Equipped with 3D reduction technology

Specification			
Screen Size	43"	50"	55"
Panel Brand (Option)	BOE/LG/AUO,etc.	BOE/LG/AUO,etc.	BOE/LG/AUO,etc.
Resolution	1920*1080/3840*2160 DPI	1920*1080/3840*2160 DPI	1920*1080/3840*2160 DPI
Display Area (H*V)	941.184x529.416mm	1073.8*604mm	1209.6*680.4mm
Dot pitch	0.1634x0.4902mm 0.0817x0.2451mm	0.1864x0.5592mm 0.0932x0.2796 mm	0.210*0.630 mm 0.105x0.315 mm
Viewing Angle	H178°/V178°	H178°/V178°	H178°/V178°
Brightness	350-500cd/m2	350-500cd/m2	350-500cd/m2
Contrast	3000:1	3000:1	3000:1
Colors	16.7M	16.7M	16.7M
Response time	5ms	5ms	5ms
Lifetime	≥60000 hours	≥60000 hours	≥60000 hours
Touch screen optional	Infrared/Capacitive 10 points	Infrared/Capacitive 10 points	Infrared/Capacitive 10 points
Power	AC 110-240V (50/60Hz)	AC 110-240V (50/60Hz)	AC 110-240V (50/60Hz)
Power consumption	≤65-80W	≤80-100W	≤115-135W
Working temperature	-5℃ ~ 60℃	-5℃ ~ 60℃	-5℃ ~ 60℃
Working humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
Frame	Metal case/Aluminum profile	Metal case/Aluminum profile	Metal case/Aluminum profile
Glass	Tempered glass	Tempered glass	Tempered glass
Back frame	Floor standing	Floor standing	Floor standing
Product size	/(mm)	/(mm)	/(mm)


360° Rotating Standing LCD Digital Signage

Ultra-thin ultra large viewing angle
Feely split scree 1080P Full HD
IR touch & Capacitive touch



Multimedia interactive platforr
(Android, Windows, Linux)

Touch screen Up to 10 touch,
6ms fast response,brings
a pleasant touch experience





Android OS

Support intallation Android app



Windows OS

Support download software,
such as Word,Excel,PPT, etc.

Product Detail


PRODUCT INFORMATION



正面/POSITIVE





侧面/SIDE

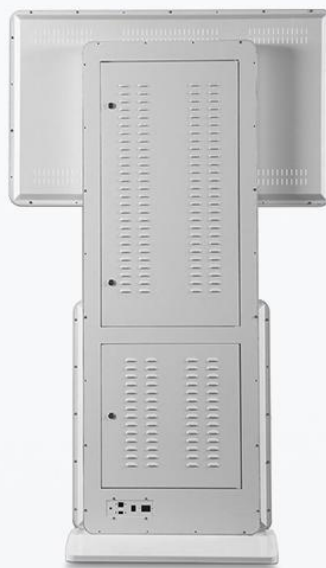

背面/BACK

Product Size

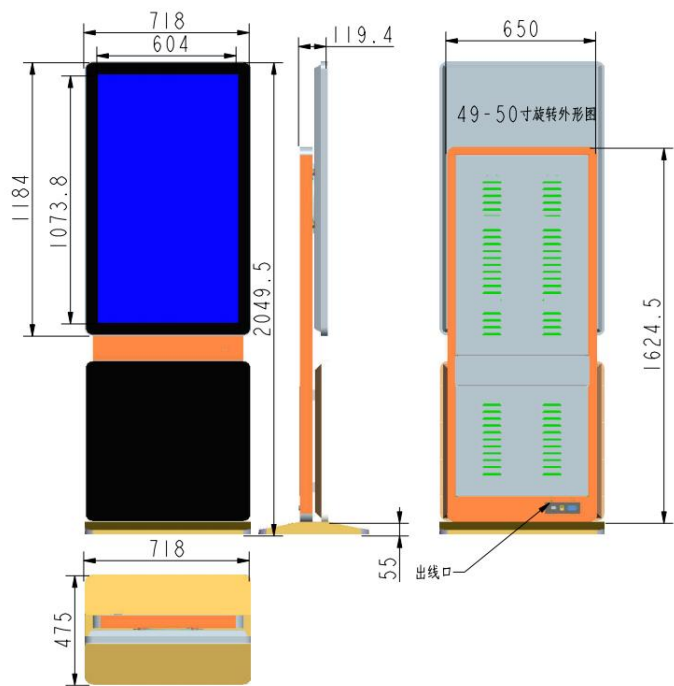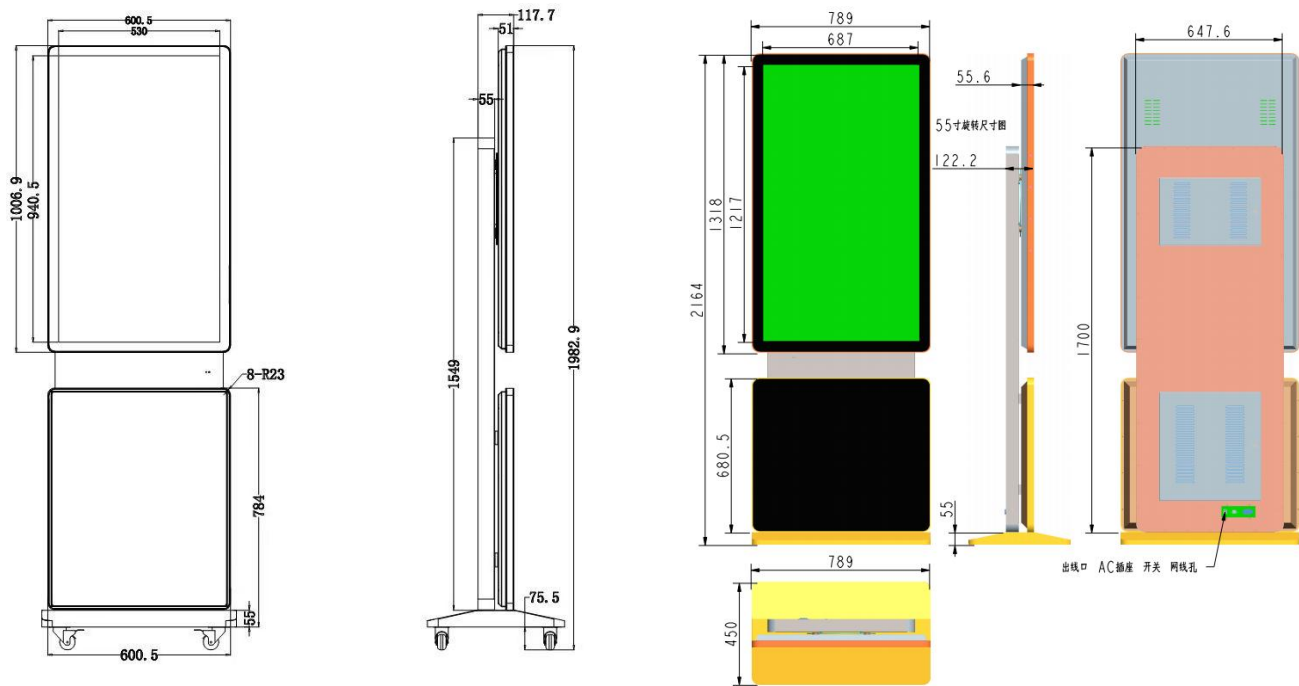



Cloud intelligent publishing CMS system

Multimedia publishing platform, cloud intelligent operation,
remote management of advertising machine multi-terminal login,
Cloud management, real-time monitoring, publishing material



Application



Shopping mall store



High-speed train waiting hall



4S store



Restaurant



Hall of Government



Bank